

Fidas® Smart 100



Fidas® Smart 100 is the most advanced compact measuring instrument for ambient air quality. It continuously and reliably analyzes airborne fine dust particles in the size range of 0.175 – 20 μm . The Fidas® Smart is approved by TÜV for PM2.5 and PM10 for official measurements. In addition to the fine dust fraction relevant for regulatory immission control, Fidas® Smart 100 simultaneously calculates and stores PM1, PM4, total dust, particle number concentration, and their particle size distribution, including pressure, temperature, humidity, CO2, carbon-based PM fractions (PMx_CE) and TVOC (total volatile organic components).

Model Variations



Fidas® Smart100E

Fine dust measuring device for existing roof openings for measuring PM2.5 and PM10 (EN 16450 certified) and other parameters such as PM1, PM4, TSP

Operation principle

Compact measuring instrument for the determination of fine dust

The system works on the 90-degree scattered light measurement principle on a single particle, considering signal duration and shape. Technology and algorithms were developed based on the EN 16450-certified Fidas® 2001. Automatic calibration tracking of the measurement system allows operation for up to two years without recalibration. If necessary, the calibration status can be checked and corrected using a test dust calibrated by Palas.

Palas aerosol spectrometers are thus the only optical fine dust measuring instruments that can be calibrated against a traceable standard by the user at the point of operation.

Fidas® Smart 100 features Ethernet, WLAN, and mobile phone connectivity. All measured values are calculated and recorded directly and, if desired, can be transferred to Palas' own cloud MyAtmosphere2 directly for visualization or further processing.

Comparison measurement

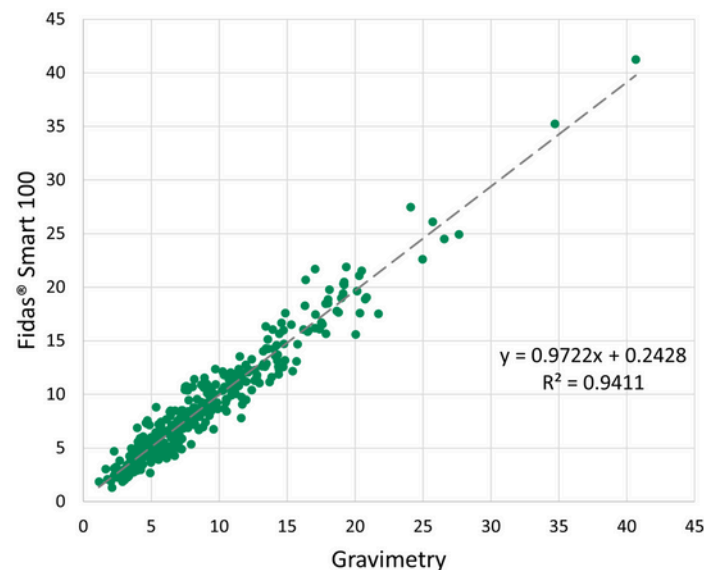


Fig. 1: Fidas® Smart 100 vs. Gravimetry PM_{2.5}

¹Fidas® 200: <http://www.palas.de//product/fidas200>
²MyAtmosphere: <https://my-atmosphere.net/>

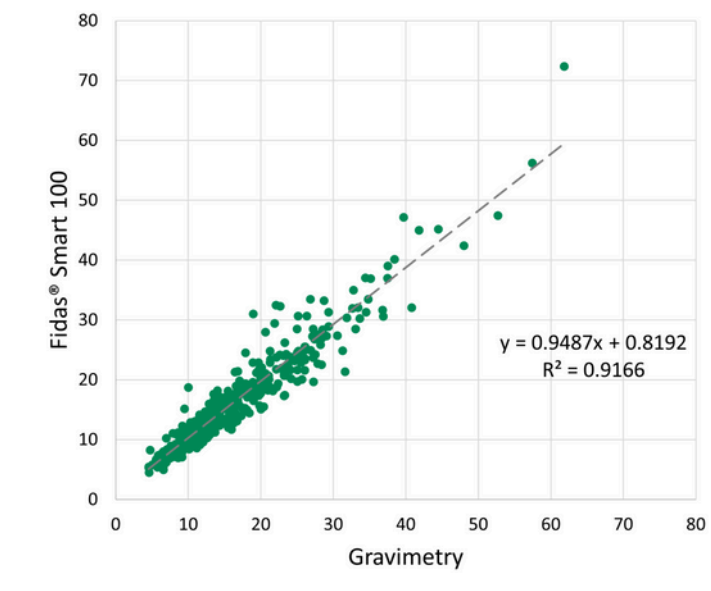


Fig. 2: Fidas® Smart 100 vs. Gravimetry PM₁₀

Extensions/Accessories

Fidas® Smart 100 is equipped with robust weather protection and can be combined with various commercially available mounting systems via a VESA mount.

Benefits

- Technology based on the certified Fidas® 200 series (EN16450 and MCERTS); simultaneous measurement of Cn, PM1, PM2.5, PM4, PM10
- High accuracy due to advanced algorithms
- Long-term stable due to self-calibration; up to 2 years of operation without calibration possible.
- On-site recalibration with test dust (NIST traceable) is possible
- Operation with AC or DC power source
- Long-life blower for sample airflow
- Regulated aerosol heating to avoid condensation

Datasheet

Measuring principle	Optical light scattering at single particles
Reported data	PM1, PM2.5, PM4, PM10, TSP, CN, particle size distribution, ambient pressure, ambient temperature, rel. ambient humidity, CO2, TVOC, Air Quality Index, source indication (depending on configuration)
Measurement range (number CN)	0 – 20,000 particles/cm ³ 0.18 – 18 µm (certified range, other measuring
Measurement range (size)	ranges on request)
Measurement range (mass)	0 – 20,000 µg/m ³
Measurement uncertainty	9.0 % for PM2.5, 9.7 % for PM10 (expanded measurement uncertainty according to EN 16450, TÜV Report)
Volume flow	1 l/min $\hat{=}$ 0.06 m ³ /h
Size channels	64 (32/decade)
Time resolution	1s–24h
Interfaces	USB, Ethernet (LAN), Wi-Fi, 4G (optional via LTE stick)
User interface	Touchscreen 800 • 480 Pixel, 5" (12,7 cm)
Protocols	UDP, ASCII, Modbus
Data logger storage	10GB
Software	PDAnalyze
Data acquisition	Digital, 22 MHz processor, 256 raw data channels
Light source	Long term stable LED
Housing	Polymer housing with weather protection and tripod/wall/pole mount option
Operating system	Windows 10 IoT Enterprise
Power supply	115 – 230 V, 50/60 Hz
Power consumption	Normal operation: 15 W, max. 60 W
Installation conditions	-20 – +50 °C (weatherproof)
Response time	< 2 s
Dimensions	240•320•190mm(H•W•D)
Weight	3.9 kg
Sampling system	Drying of the aerosol by compact IADS (Intelligent Aerosol Drying System) - Version E: extended inlet for installation in measuring containers
Noise emission	< 40 dB(A)
Resolution	0.1 µg/m ³
Power consumption	Normal operation: 15 W, max. 60 W
Data Management	Prepared for connection to the Palas Cloud MyAtmosphere ("MyAtmosphere-ready"); internet access and separate registration required. MyAtmosphere terms and conditions of use apply

Applications

- Regulatory environmental monitoring
- Construction sites
- Networks with roads, railways, and ports
- Smart City
- Occupational safety
- Industry

Office Location

Kingfisher Business Park
London Road
Stroud
Gloucestershire
GL5 2BY

Registered in England No. 01726773



Enviro
Technology Services Ltd

part of  CuraTerra

info@et.co.uk | +44 (0) 1453 733200 | www.et.co.uk